



# AL-5

Aluminum Dent  
Pulling System

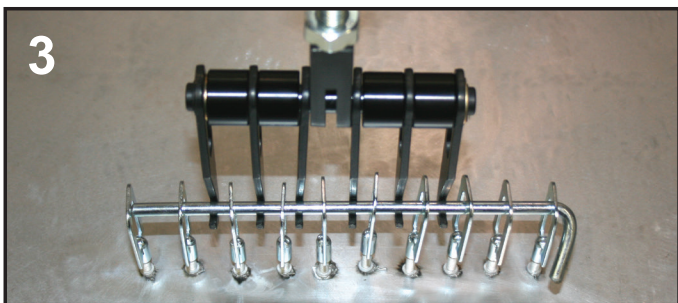

Pro Spot AL-5 Capacitor Discharge Stud Welder is designed for aluminum dent pulling but can also be used with steel studs for welding to UHSS panels with no or very little heat applied to the panels. The welder is very easy to use and is controlled by one knob to adjust duration of weld time. The welder auto detects the line voltage between 110 VAC – 240 VAC.

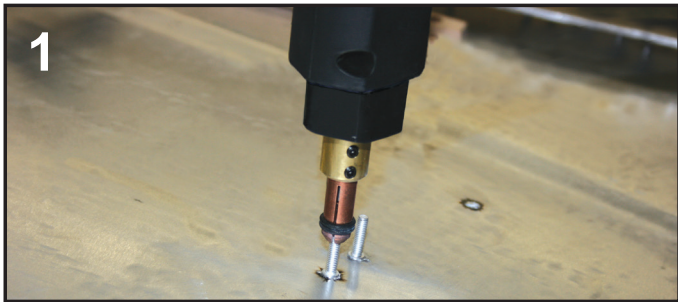

## Accessories




PRO-ALHMR  
3 pc. Aluminum  
Hammer Set  
(optional)



50-0580  
Stainless Steel  
Brushes (optional)




89-1509  
Cool Gel Heat  
Barrier Spray (optional)

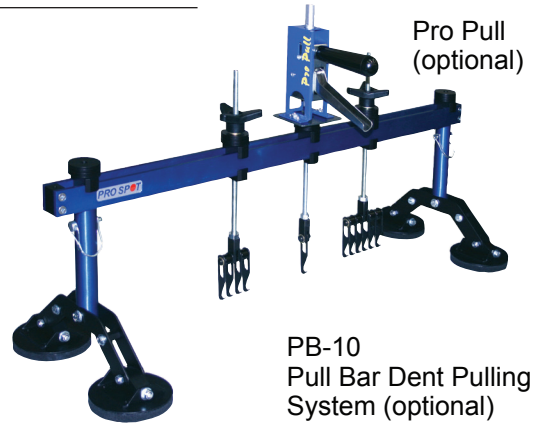

Pro Pull  
(optional)

PB-10  
Pull Bar Dent Pulling  
System (optional)

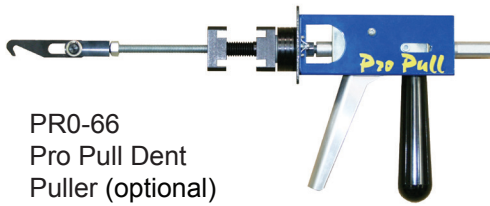


PR0-66  
Pro Pull Dent  
Puller (optional)  
shown with optional SA-0026  
Hook Adapter



85-3088  
Air Grinder  
(optional)



85-0421  
Infrared Laser  
Thermometer  
(optional)



90-0176  
Pull Washers  
12 ea.




50-1320  
M4 Studs  
50 ea.

## Pull Bar Dent Removal System

Designed for both aluminum & steel dent pulling. Our new Pull Bar features a 4 & 6 Jaw clamp, and adjustable foot swivel pads for mounting both vertically & horizontally. The dent pull bar makes dent pulling extremely easy, quick & accurate. The pull bar can also adapt to the Pro Pull system for isolated dent pulling.

PR0-66 Pro Pull shown with optional SA-0028  
Single Pull System



### Technical Specifications:

Input Voltage: 110 - 220V (Auto Detect)  
Amperage: 5 - 12A  
Cord Length: 10'  
Stud Diameters: Standard 4mm x 16mm  
(M5, M6 M8 optional)  
Dimensions: 13.7" L x 7.5" W x 10.8" H  
Weight: 37 lb (17 kg)

### Pro Spot International, Inc. U.S.A.

Toll Free: 1-877-PRO SPOT  
Phone: 760-407-1414  
Fax: 760-407-1421  
E-mail: [info@prospot.com](mailto:info@prospot.com)  
Web: [www.prospot.com](http://www.prospot.com)